

CONTATOR LINHA CJX1B

Os contadores da Linha CJX1B seguem a Norma IEC 947-4 e possuem Proteção IP20.






INFORMAÇÕES GERAIS


Código:		04001	04002	04003	04004	04005	04006	04007
Modelo:		CJX1B-0922	CJX1B-1222	CJX1B-1622	CJX1B-2222	CJX1B-3222	CJX1B-3822	CJX1B-4522
Tensão de isolamento:		690	690	690	690	690	690	1000
Corrente operacional	AC-3	9	9	16	22	32	38	45
(380V)	AC-4	3.3	4.3	7.7	8.5	15.6	18.5	24
Saída nominal de motores trifásicos a 50Hz	AC-3	230/220V	2.4	3.4	4	5.5	8.5	11
		400/380V	4	5.5	7.5	11	15	18.5
		500V	5.5	7.5	9	11	21	25
		690/660V	5.5	7.5	11	11	23	23
	AC-4	400/380V	1.48/1.4	2/19	3.5	4.4	7.5	9
		690/660V	2.54/2.4	3.45/3.3	6	6	13	15.5
Resistência mecânica (milhões)		15 (x10 ⁶)	15 (x10 ⁶)	15 (x10 ⁶)	15 (x10 ⁶)	10 (x10 ⁶)	10 (x10 ⁶)	10 (x10 ⁶)
Resistência elétrica	AC-3	1.2	1.2	1.2	1.2	1.2	1.2	1.2
	AC-4	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Freq. de comutação	AC-3	1000	1000	750	750	750	750	1000
	AC-4	250	250	250	250	250	250	400
Tolerância de tensão da bobina		(0.8~1.1)Us	(0.8~1.1)Us	(0.8~1.1)Us	(0.8~1.1)Us	(0.8~1.1)Us	(0.8~1.1)Us	(0.8~1.1)Us
Consumo de energia de moeda (50Hz)	Close	10	10	10	10	12.1	12.1	17
	p.f	0.29	0.29	0.29	0.29	0.28	0.28	0.29
	Fechando	68	68	68	68	101	101	183
	p.f	0.82	0.82	0.82	0.82	0.83	0.83	0.6
Atualidade convencional		20	20	30	30	55	20	80
Corrente térmica convencional de contatos auxiliares		10	10	10	10	10	10	10
Força operacional corrente de contatos auxiliares		6/10	6/10	6/10	6/10	6/10	6/10	4/6
Ith (AC-1)		20A	20A	30A	30A	55A	55A	45A
Peso		AC0.43	AC0.43	AC0.49	AC0.49	AC0.8	AC0.43	AC1.4/1.6
Temperatura Ambiente		-25° a + 55° C						

DIMENSÕES (MM)

Modelo	A	a	B	b	C
CJX1-9,12	45	---	75	60	97
CJX1-16,22	45	---	84	75	107
CJX1-32,38	82	---	102	---	104
CJX1-45,63	89	70	117	---	125
CJX1-75,85	101	70	135	---	141
CJX1-110,140	120	101	150	---	155

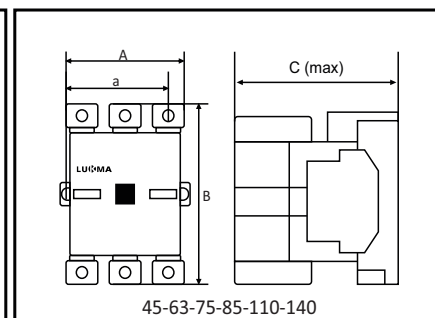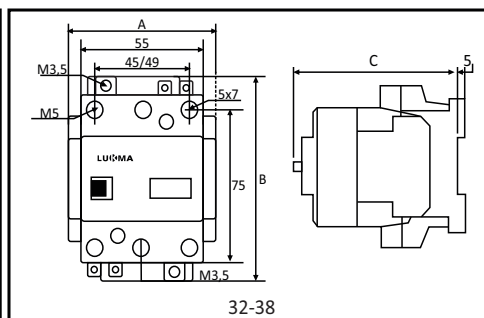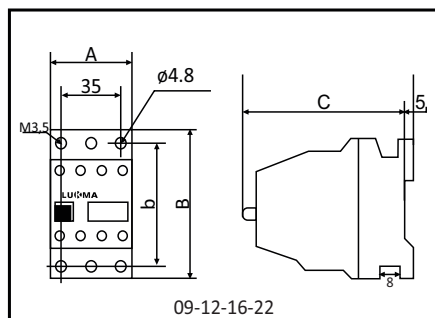


INFORMAÇÕES GERAIS




Código:		04008	04009	04010	04011	04012	04013	04014
Modelo:		CJX1B-6322	CJX1B-7522	CJX1B-8522	CJX1B-11022	CJX1B-14022	CJX1B-17022	CJX1B-20522
Tensão de isolamento:		1000	1000	1000	1000	1000	1000	1000
Corrente operacional	AC-3	63	75	85	110	140	170	205
(380V)	AC-4	28	34	42	54	68	75	96
Saída nominal de motores trifásicos a 50Hz	AC-3	230/220V	18.5	22	26	37	43	55
		400/380V	30	37	45	55	75	90
		500V	41	50	59	76	98	118
		690/660V	55	67	67	100	100	156
		1000	-	39	39	65	65	90
	AC-4	400/380V	14.7/14	17.9/17	17.9/17	28.4/27	36/35	40/38
		690/660V	25.4/24.3	30.9/29.5	30.9/29.5	49/46.9	63/60	69/66
								90/86
Resistência mecânica (milhões)		10 (x10 ⁶)	10 (x10 ⁶)	10 (x10 ⁶)	10 (x10 ⁶)	10 (x10 ⁶)	10 (x10 ⁶)	10 (x10 ⁶)
Resistência elétrica	AC-3	1.2	1.2	1.2	1.2	1.2	1.2	1.2
	AC-4	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Freq. de comutação	AC-3	1000	1000	1000	1000	700	700	500
	AC-4	300	300	300	300	200	200	130
Tolerância de tensão da bobina		(0.8~1.1)Us	(0.8~1.1)Us	(0.8~1.1)Us	(0.8~1.1)Us	(0.8~1.1)Us	(0.8~1.1)Us	(0.8~1.1)Us
Consumo de energia de moeda (50Hz)	Close	17	32	32	39	39	58	58
	p.f	0.29	0.29	0.29	0.24	0.24	0.26	0.26
	Fechando	183	330	330	550	550	910	910
	p.f	0.6	0.6	0.6	0.45	0.45	0.38	0.38
Atualidade convencional		90	100	100	160	160	210	210
Corrente térmica convencional de contatos auxiliares		10	10	10	10	10	10	10
Força operacional corrente de contatos auxiliares		4/6	4/6	4/6	4/6	4/6	4/6	4/6
Ith (AC-1)		90A	100A	100A	160A	180A	200A	210A
Peso		AC1.4/1.6	AC2.3/2.5	AC2.3/2.5	AC3.3/3.5	AC3.3/3.5	AC4.8/5.0	AC4.8/5.0
Temperatura Ambiente		-25° a + 55° C						

DIMENSÕES (MM)

Modelo	A	a	B	C
CJX1-63	89	70	117	125
CJX1-75-85	101	70	135	141
CJX1-110-140	120	101	150	155
CJX1-170-205	135	110	180	188

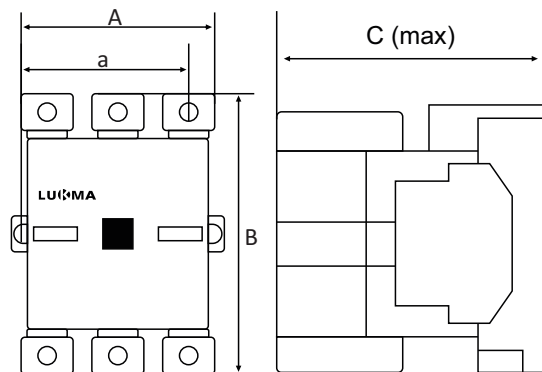

63-75-85-110-140

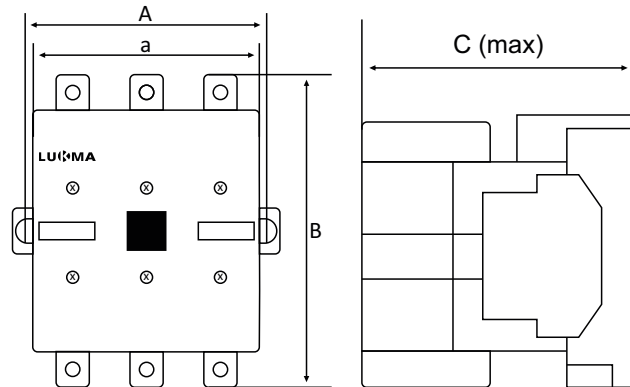

170-205

