


BOBINA PARA CONTATOR CJX1B

INFORMAÇÕES GERAIS

Modelo	Tensões disponíveis
BCJX1-40/43 (3TY7)	24V, 110V, 220V, 380V
BCJX1-44/45 (3TY7)	24V, 110V, 220V, 380V
BCJX1-46/47 (3TY7)	24V, 110V, 220V, 380V
BCJX1-48/49 (3TY7)	110V, 220V, 380V
BCJX1-50/51 (3TY7)	110V, 220V, 380V
BCJX1-52/53 (3TY7)	220V
BCJX1-54 (3TY7)	220V
BCJX1-56 (3TY7)	220V
Frequência: 60Hz	

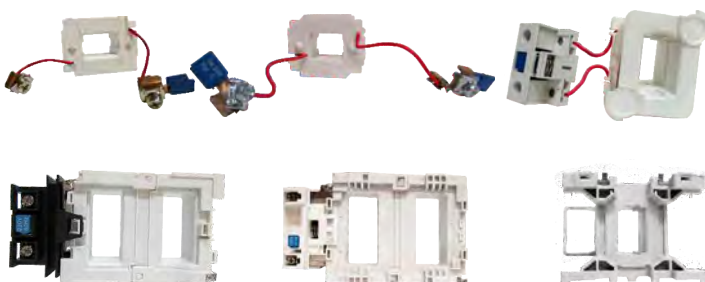








RELÉ TÉRMICO - LINHA JRS2

Modelo	Faixa de Ajuste (A)	Contator Compatível
JRS2-12,5 (3UA50)	0,63~1 / 1~1,6 / 1,6~2,5 2,5~4 / 4~6,3 / 6,3~10 8~12,5	CJX1B 09~22 (3TF40) (3TF41)
JRS2-25/Z (3UA52)	2,5~4 / 4~6,3 6,3~10 / 8~12,5	CJX1B 16~22 (3TF42) (3TF43)
JRS2-25/Z (3UA52)	10~16 / 12,5~20 / 16~25	CJX1B 16~22 (3TF42) (3TF43)
JRS2-40/Z (3UA55)	6,3~10 / 10~16 / 12,5~20 20~32 / 25~36 / 32~40 36~45	CJX1B 32~38 (3TF44) (3TF45)
JRS2-80/Z (3UA58)	20~32 / 32~50 / 50~63 63~80 / 70~88	CJX1B 45~85 (3TF46) (3TF47) (3TF48) (3TF49)
JRS2-135/Z (3UA60)	63~90 / 90~120 110~135 / 120~150	Ligação por Rabicho (3TF50) (3TF51)
JRS2-180/Z (3UA62)	90~120 / 120~150 150~180	Ligação por Rabicho (3TF52) (3TF53)
JRS2-400/Z (3UA66)	160~250 / 200~320 / 250~400 320~500 / 400~630	Ligação por Rabicho (3TF54) (3TF56)



RELÉ TÉRMICO - LINHA JRS2

DIMENSÕES (MM)

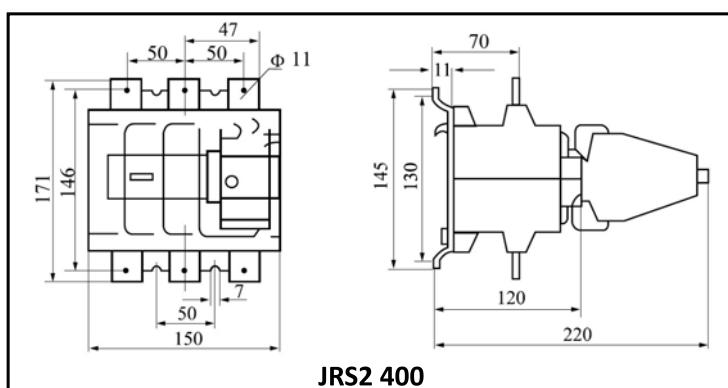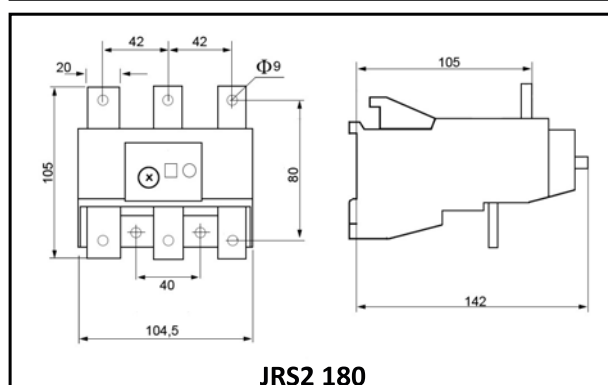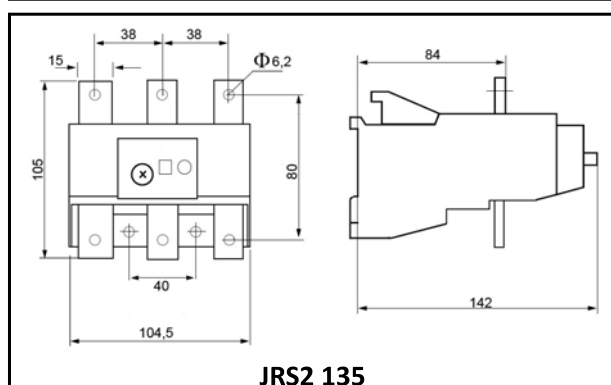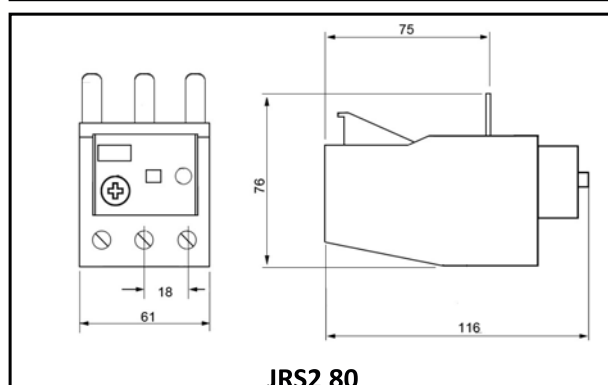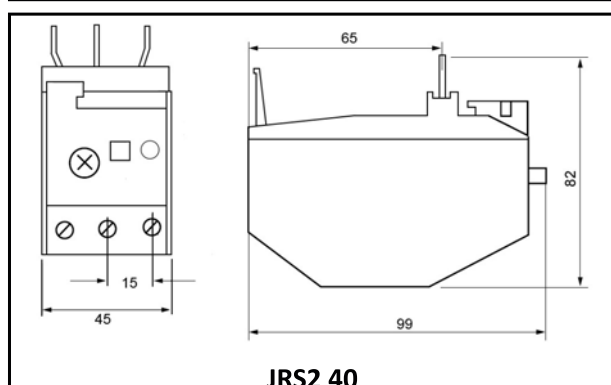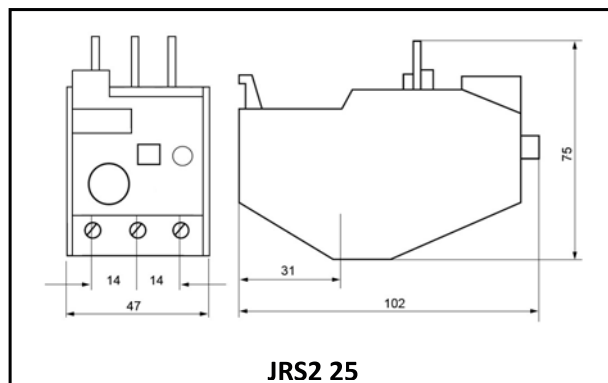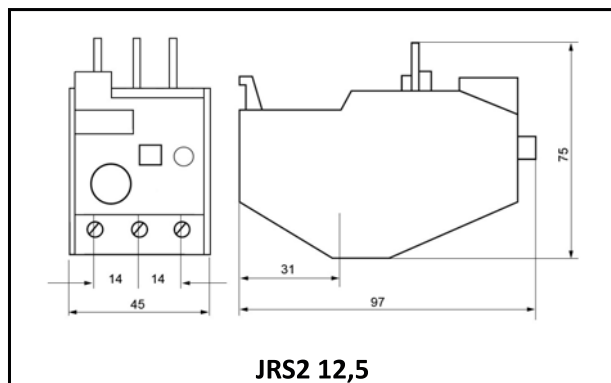

SUPORTE PARA RELE JRS2

Código	31005	31006	31007
Modelo	JRS2-12,5/Z (3UA50)	JRS2-25/Z (3UA52)	JRS2-80/Z (3UA58)
Descrição	3XU-1418	3XU-1420	3XU-1421

